





6285 RANDOLPH STREET
CITY OF COMMERCE, CA 90040
(323) 726-8814 • FAX (323) 726-0338
www.airlouvers.com

MODEL 1000 A (SHOWN) 1000 C, 1000 CORE

Model 1000

Lightproof Overlapping Channel Blades

For darkrooms, x-ray rooms and other applications where ventilation is required without light admission.

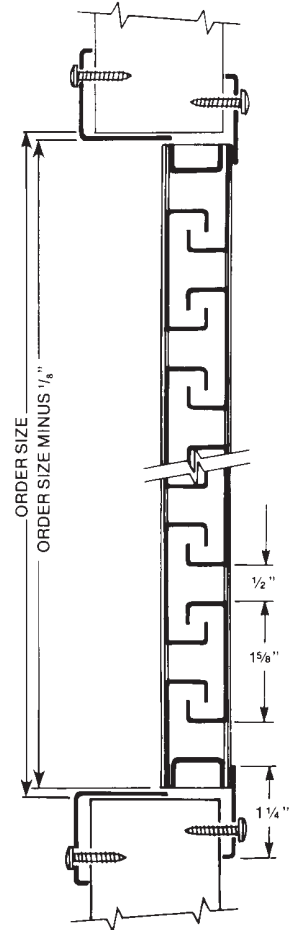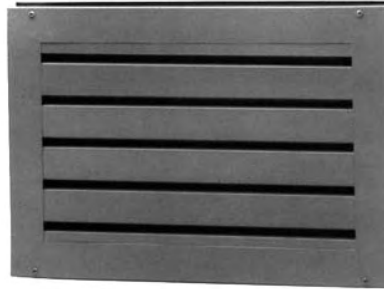

Specifications

Standard Features:

Material: 18 gauge CRS frame and louver blades.

Construction: Mitered and welded corners.

Finish: Painted non-reflective black.

Door: For 1 3/4" door.

Fasteners: #8 x 3/4" phillips head screws.

Free Flow Area: 20% free area.


Model 1000A
Basic blade unit with flanged frame welded to face (corridor) side and separate flanged frame on opposite side; frame adjustable to fit any door thickness from 1- 3/8" to 1- 3/4".

Options:


Leadlined for radiation containment.

Size: _____ " wide x _____ " high _____ Quantity
(door cut out size equals order size).

Mounting Options:



Model 1000 Core
Basic blade unit only; for interior doors; or as transom interior louver held in place with wood or metal moulding (furnished by others).



Model 1000 C
Basic blade unit with single flanged frame welded to face (corridor) side; for or exterior doors: wood or metal moulding (by others) used on opposite side.

Distributor: _____
Architect: _____
Contractor: _____

Project: _____
Location: _____
Date: _____