



6285 RANDOLPH STREET  
 CITY OF COMMERCE, CA 90040  
 (323) 726-8814 • FAX (323) 726-0338  
 www.airlouvers.com

# MODEL 1200-A



## Model 1200-A

**Twin "Z" Blades**  
 (Fixed and adjustable)  
 Recommended for applications where both non-vision and adjustable design is required in a tandem unit.


## Specifications

### Standard Features:

- Material:** 18 gauge CRS frame and louver blades.
- Construction:** Mitered and welded corners; adjustable blades are manually operated from interior (occupancy) side. Fixed blades on exterior of louver.
- Finish:** Mineral bronze baked on powder coat.
- Door:** For 1<sup>3</sup>/<sub>4</sub>" door.
- Fasteners:** Countersunk mounting holes with #8 x <sup>3</sup>/<sub>4</sub>" phillips flathead screws.
- Free Flow Area:** 43% free area.

### Options:

- Material:**  #20 gauge 304 stainless steel - #4 finish
  - Finish:**  Special order baked enamel colors  
 Baked on powder coat gray prime for field painting, no extra charge.
  - Fasteners:**  #8-32 phillips flathead machine screw thru-bolted to #8-32 binder bolt with blank head on corridor side of frame.
  - Screens:**  18-14 mesh insect screen installed in roll formed aluminum frame. Aluminum, bronze or fiberglass mesh available.
- Size:** \_\_\_\_\_ " wide x \_\_\_\_\_ " high \_\_\_\_\_ Quantity  
 (door cut out size equals order size).

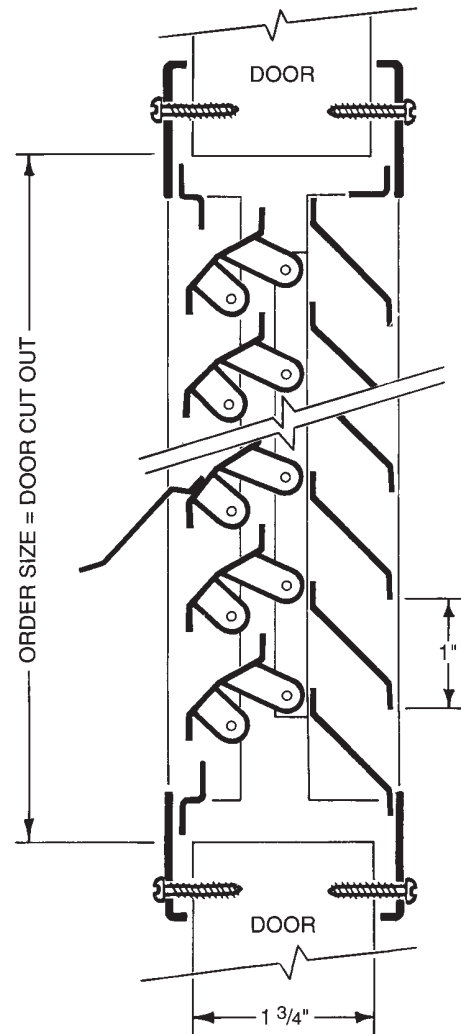

Distributor: \_\_\_\_\_  
 Architect: \_\_\_\_\_  
 Contractor: \_\_\_\_\_

Project: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Date: \_\_\_\_\_