


INVERTED V-BLADE LOUVER: 600 SERIES

Inverted "V" Blades with 60% Free Area - Recommended for Schools, Class "A" and Institutional Buildings



600A1
Photo &
Drawing

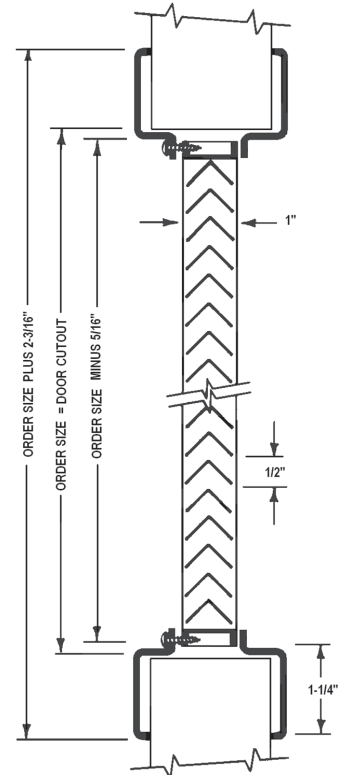

SPECIFICATIONS:

Material:	20 gauge CRS frame and louvers. Min size 6" x 4", max 24" x 80".
Construction:	Louvers: Inverted "V" blades with 1/2" blade spacing are attached by interlocking construction to a 1" deep, welded frame. Non-vision. 600A1 Frame: 1-1/4" trim, mitered and welded corners. Screws fasten through frame into louver core, leaving corridor side of frame free of fasteners.
Door:	____ 1-3/4" - Any Model Door cutout = order size. ____ 1 3/8"-1 3/4" - 600CORE, 600C, 600A
Mounting Options:	____ Select one mounting option from table below.
Fasteners:	Phillips head screws #8 x 3/4"
Powder Coat Finishes:	____ (B) Mineral Bronze (standard color) ____ (G) Gray ____ (BK) Black ____ (FBK) Flat Black ____ (W) White ____ (SB) SC Beige ____ (SA) Satin Aluminum ____ (S) Sand ____ (AB) AMS Beige ____ (R) Red ____ (GH) Gray Hammettone Color Samples Online
Free Flow Area:	60% free area.



OPTIONAL FEATURES AT ADDITIONAL COST:

Finishes & Materials:	____ (S) 20 gauge stainless steel, #4 finish ____ 16 gauge CRS ____ (G) Galvanized sheet for exterior use and corrosion-resistance ____ (EG) Electro Galvanized for corrosion resistance & exterior use ____ Special order colors. Please provide color chip.
Fasteners:	____ Torx ____ Hex head ____ Other: _____
Screen:	____ 18x14 mesh insect screen installed in roll-formed aluminum frame. ____ aluminum ____ bronze ____ fiberglass ____ stainless ____ Bird Screen.
Custom:	Custom sizes, other door thickness, other options; Contact Customer Service.

Order Format: 600 _____
Example: 600AS1212 A,A1,CORE,C Option S,G,EG W H Color

DOOR MOUNTING OPTIONS - SELECT ONE	
600A1: Self-attaching, vandal-proof design; basic blade unit with flanged frame welded to face (corridor) side and separate removable flanged frame on opposite side; fits 1-3/4" door only.	
600 CORE: Basic blade unit only; for interior door or as transom louver held in place with wood or metal moulding (furnished by others)	
600C: Basic blade unit with single flanged frame welded to face (corridor) side; for interior or exterior door; wood or metal moulding (by others) used on opposite side	
600A: Basic blade unit with flanged frame welded to face (corridor) side and separate flanged frame on opposite side; frame adjustable to fit any door thickness from 1-3/8" to 1-3/4"	

	Distributor: _____	Width: _____ x Height: _____
	Architect: _____	Quantity: _____
	Contractor: _____	Model: _____
	Project: _____	Date: _____ Version: ALSPDS1001
<p>Hdqtrs:4450 WEST 78TH ST CIR., BLOOMINGTON, MN 55435-5416 PH: 800-554-6077 FAX: 952-835-2218 EMAIL: SALES@AIRLOUVERS.COM VISIT WWW.ACTIVARCPG.COM FOR THE MOST UPDATED PRODUCT INFORMATION • AN ACTIVAR CONSTRUCTION PRODUCTS COMPANY ACPG WEST COAST (AIR LOUVERS MANUFACTURING):COMMERCE CA • WAREHOUSES:LANCASTER PA, ATLANTA GA, CHICAGO IL , Bloomington MN</p>		