

# MODEL 700TL FLUSH MOUNTED TRANSOM LOUVER

Features two rows of "Z" blades for non-vision and flush mounting in hollow metal frames.



## Specifications

### Standard Features:

**Material:** 18 gauge CRS

**Construction:** Two rows of louvers welded to a 1" x 1-13/16" x 1" channel. Maximum size 36" x 36". Multiple sections can be combined for larger transoms.

**Fasteners:** Mounting clips furnished with hex head self-drilling tek screw.

**Finish:** Gray baked-on powder prime coat.

**Free Flow Area:** 50% free area.


### Options:

- Material:**
- 16 gauge CRS
  - 20 gauge stainless steel satin finish
  - Galvanized Sheet for Corrosion-Resistant & Exterior App.
  - Electro Galvanized Steel for Maximum Corrosion-Resist.

- Finish:**
- Mineral bronze baked-on powder coat
  - Special order colors. Please provide color chip

- Screen:**
- 1/4" x 1/4" or 1/2" x 1/2" bird screen
  - 18-14 mesh insect screen installed in roll-formed aluminum frame. Screen concealed between louvers

**Size:** \_\_\_\_\_ " wide x \_\_\_\_\_ " high \_\_\_\_\_ Quantity  
 (transom opening equals order size)

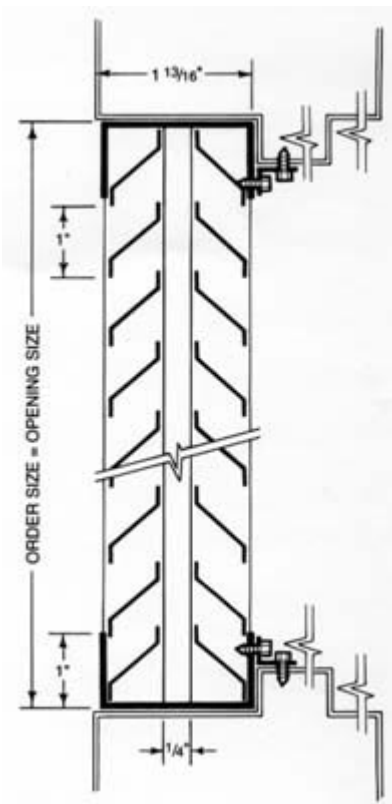

Distributor:	Project:
Architect:	Location:
Contractor:	Date: