


# SLIMLINE VISION LITE FOR 1/4"-1" GLASS: VSIG

V5

Low Profile Beveled Vision Lite For Fire Rated Doors. Corridor Side of Door is Free of Fasteners  
For Glazing thickness of 5/16" to 1"

## SPECIFICATIONS:

<b>Material:</b>	20 gauge CRS frame. Min. size 3" x 3", max. 60" x 104". See Fire Rating Below.
<b>Construction:</b>	1-1/4" trim with radius corners, mitered and welded. Continuous glass retainer, countersunk mounting holes in the bevel on non-corridor side.
<b>Door:</b>	For 1-3/4" door. For other sizes, see VLFIG and VLFEZIG.
<b>Fasteners:</b>	#8 x 1-1/4" flathead phillips SMS
<b>Powder Coat Finishes:</b>	<input type="checkbox"/> (B) Mineral Bronze (stock color) <input type="checkbox"/> (BK) Black <input type="checkbox"/> (FBK) Flat Black <input type="checkbox"/> (W) White <input type="checkbox"/> (SB) SC Beige <input type="checkbox"/> (SA) Satin Aluminum <input type="checkbox"/> (R) Red <input type="checkbox"/> (S) Sand <input type="checkbox"/> (G) Gray Primer <input type="checkbox"/> (AB) AMS Beige <input type="checkbox"/> (GH) Gray Hammertone <b>Color Samples Online</b>
<b>Glass:</b>	<p><b>" Glass Thickness Will Be Used for this Order</b></p> <p>5/16"-1" glazing to be ordered separately from <b>Glazing Section</b> of catalog. Use fire rated glazing with Warnock Hersey (WHI) or UL classification markings for fire rated applications. Visible light is 2" under rough opening size. <u>Glass is 1" under order size.</u> Must specify glass thickness above. If glazing is being provided by a supplier other than Air Louvers, coordinate with the supplier to ensure compatibility with IG kits.</p> <p><b>Fire-Rated Air Louvers Glazing to fit this vision frame: KFRL, KRFU, SWISS45, SWISS60, CONTRA 60, ARMRSIELD, LGSIELD.</b></p>
<b>Fire-Rating, Testing &amp; Listings:</b>	When installed in properly rated and approved door, ratings up to 3 hours can be achieved, depending on the glazing used. See glazing ratings for max exposed area. Tested and Listed for UL 10C and Criteria of UBC 7-2 Positive Pressure. See Instructions

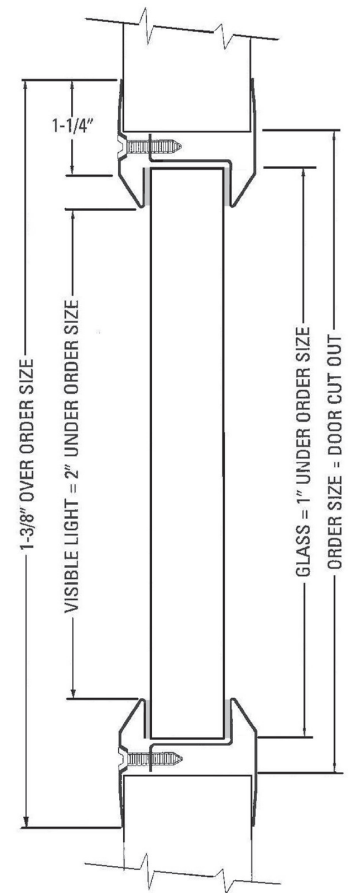

## OPTIONS AT ADDITIONAL COST:



<b>Finishes &amp; Materials:</b>	<input type="checkbox"/> (S) 20 Gauge Stainless Steel: #4 Finish. <input type="checkbox"/> (G) Galvanized Sheet for Exterior Applications. <input type="checkbox"/> (EG) Electro Zinc Plating for Maximum Corrosion Resistance. <input type="checkbox"/> Optional colors. Please provide color chip & contact Customer Service.
<b>Fasteners:</b>	<input type="checkbox"/> Torx <input type="checkbox"/> Hex head <input type="checkbox"/> Other: _____
<b>Mullions:</b>	Factory welded to vision lite & painted. See <b>VSL-G</b> Page in this section to order.
<b>Custom:</b>	PAK, smaller or larger sizes, or other options, contact Customer Service for special orders.
<b>Miniblind in Vision Lite:</b>	Blinds are sealed between the two lites of glass. See separate <b>VSLIGMB</b> page in this section

**STOCK ITEM - MANY STANDARD SIZES OF VSIG IN STOCK FOR NEXT DAY SHIPMENT FROM ALL WAREHOUSES**

Order Format:

**VSIG**

Option S,G,EG

W

H

Color

Glass Thickness

Example: VSIG 1818B 1"

Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

	<b>Distributor:</b>	Width: _____ x Height: _____
	<b>Architect:</b>	Quantity:
	<b>Contractor:</b>	Model:
	<b>Project:</b>	Date: _____ Version: ALSPDS1001
<p>Hdqtrs: 4450 WEST 78<sup>TH</sup> ST CIR., BLOOMINGTON, MN 55435-5416 PH: 800-554-6077 FAX: 952-835-2218 EMAIL: SALES@AIRLOUVERS.COM          VISIT <b>WWW.ACTIVARCPG.COM</b> FOR THE MOST UPDATED PRODUCT INFORMATION • AN ACTIVAR CONSTRUCTION PRODUCTS COMPANY          ACPG WEST COAST (AIR LOUVERS MANUFACTURING): COMMERCE CA • WAREHOUSES: LANCASTER PA, ATLANTA GA, CHICAGO IL, Bloomington MN</p>		