

# AIR LOUVERS INC.

6285 RANDOLPH STREET  
CITY OF COMMERCE, CA 90040  
(323) 726-8814 • FAX (323) 726-0338  
www.airlouvers.com



## MODEL VL3000 WITH GLAZING



TESTED AND LISTED FOR U.L. 10C AND  
CRITERIA OF UBC 7-2 POSITIVE PRESSURE

### Model VL3000

**Beveled VISION LITE  
with continuous glass retainer**

**Recommended for applications where large  
lites of glass are required in fire rated doors.  
(2,856 sq. in. 20 min.; 2,208 sq. in. 90 min.)**

## Specifications

### Standard Features:

**Material:** 20 gauge CRS frame.

**Construction:** Mitered and welded corners, beveled return, continuous glass retainer, countersunk mounting holes. Screws fasten from room side into prepunched mounting holes. This mounting method leaves corridor side of frame free of fasteners for aesthetic and security purposes.

**Finish:** Mineral bronze baked on powder coat.

**Door:** For 1-3/4" door only.

**Fasteners:** #8 x 7/8" flathead phillips head SMS.

**Glass:** 1/4" Approved wire glass by Air Louvers.


**Glazing Tape:** Pemko FGS3000S45 or FGS3000S90 by Air Louvers.

**Listings:** Listed by Underwriters Laboratory Inc. and Warnock Hersey International meets criteria of UBC 7.2 positive pressure and U.L. 10C.

### Options:

- Material:**
- 20 gauge stainless steel - #4 finish
  - Galvanized sheet for exterior use
  - Electro-galvanized steel " "
  - lead lined for x-ray protection
- Finish:**
- Baked on powder coat gray prime for field painting, no extra charge.
  - Special order colors. Please provide color chip.

**Size:** \_\_\_\_\_ " wide x \_\_\_\_\_ " high \_\_\_\_\_ Quantity  
(door cut out size equals order size)

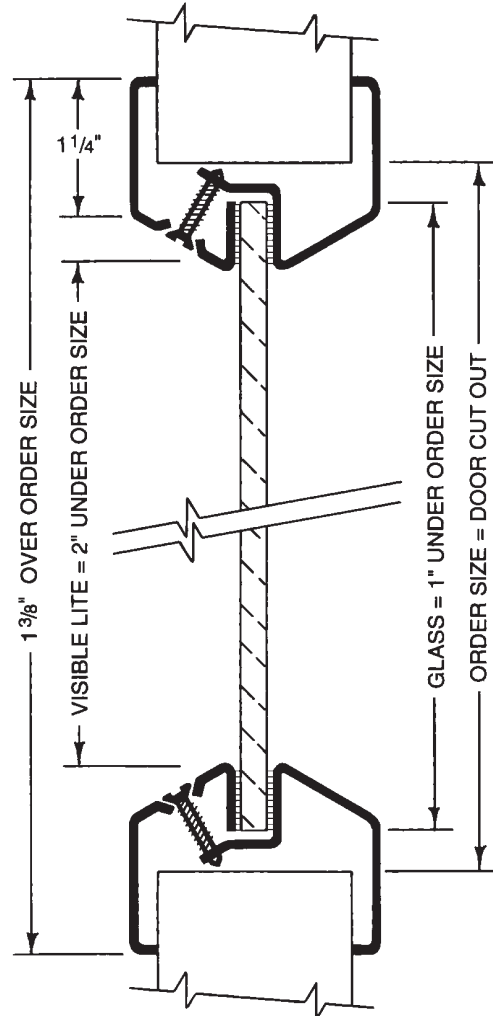

**Fire Ratings by  
Underwriters Laboratories Inc.  
and  
Warnock Hersey Int.  
See Drawings Opposite**

Distributor: \_\_\_\_\_  
Architect: \_\_\_\_\_  
Contractor: \_\_\_\_\_

Project: \_\_\_\_\_  
Location: \_\_\_\_\_  
Date: \_\_\_\_\_

