


BEVELED VISION LITE FOR 1/4 - 1" GLAZING & UP TO 2-1/2" DOOR: VLFEZIG V7

Recommended for Applications Requiring Fire Rated, Safety, and or Insulated Glazing 5/16" to 1" Thick

SPECIFICATIONS:

Material:	20 gauge CRS frame. Min Size 3" x 3", Max 60" x 104". See Fire Rating Below.
Construction:	1-1/4" trim with radius corners, mitered and welded. Continuous glass retainer, countersunk mounting holes in the bevel on non-corridor side.
Door:	1-3/8 - 2-1/2" door. Specify door thickness: _____
Fasteners:	#8 x 7/8" flathead phillips SMS
Powder Coat Finishes:	<input type="checkbox"/> (B) Mineral Bronze (standard color) <input type="checkbox"/> (BK) Black <input type="checkbox"/> (FBK) Flat Black <input type="checkbox"/> (W) White <input type="checkbox"/> (SB) SC Beige <input type="checkbox"/> (SA) Satin Aluminum <input type="checkbox"/> (R) Red <input type="checkbox"/> (S) Sand <input type="checkbox"/> (G) Gray Primer <input type="checkbox"/> (AB) AMS Beige <input type="checkbox"/> (GH) Gray Hammertone Color Samples Online
Glass:	<p>_____ " Glass Thickness Will Be Used for this Order</p> <p>5/16" - 1" glazing to be ordered separately from Glazing Section of catalog. Use fire rated glazing with Warnock Hersey (WHI) or UL classification markings for fire rated applications. Visible light is 2" under rough opening size. <u>Glass is 1" under order size.</u> Must specify glass thickness above.</p> <p>Fire-Rated Air Louvers Glazing to fit this vision frame: WS, UL PYRO, KFRL, KRFU, SWISS45, SWISS60, CONTRA60, ARMRSIELD, LGSHIELD.</p> <p>If glazing is being provided by a supplier other than Air Louvers, coordinate with the supplier to ensure compatibility with IG kits.</p>
Fire-Rating, Testing & Listings:	When installed in properly rated and approved door, ratings up to 3 hours can be achieved, depending on the glazing used. See glazing ratings for max exposed area. Tested and Listed for UL 10C and Criteria of UBC 7-2 Positive Pressure.

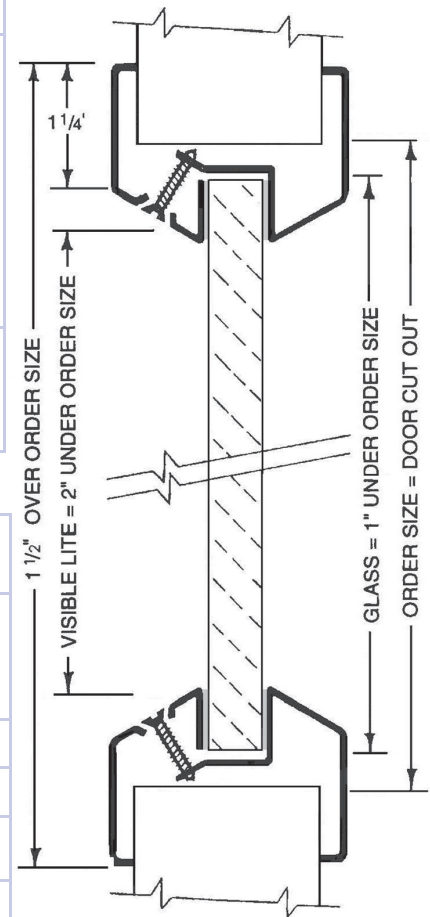

OPTIONS AT ADDITIONAL COST:



UBC 7-2 Installation:	<input type="checkbox"/> Additional intumescent tape for Positive Pressure UL10C 20 minute combustible core wood doors installation. See detailed installation instructions.
Finishes & Materials:	<input type="checkbox"/> (S) 20 Gauge Stainless Steel: #4 Finish. <input type="checkbox"/> (G) Galvanized Sheet for Exterior Applications. <input type="checkbox"/> (EG) Electro Zinc Plating for Maximum Corrosion Resistance. <input type="checkbox"/> Optional colors. Please provide color chip & contact Customer Service.
Fasteners:	<input type="checkbox"/> Torx <input type="checkbox"/> Hex head <input type="checkbox"/> Other: _____
Mullions:	Factory welded to vision lite & painted. See VSL-G Page in this section to order.
Custom:	PAK, smaller or larger sizes. Leadlined. Please consult Customer Service for Special Orders.
Miniblink in Vision Lite:	Blinds are sealed between the two lites of glass. See separate VLFEZIGMB page in this section.

Order Format: VLFEZIG

Option S,G,EG W H Color Glass Thickness

Example: VLFEZIG 1212S 1"

Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

	Distributor: _____	Width: _____ x Height: _____
	Architect: _____	Quantity: _____
	Contractor: _____	Model: _____
	Project: _____	Date: _____ Version: ALSPDS1001
<p>HQTRS:4450 WEST 78TH ST CIR., BLOOMINGTON, MN 55435-5416 PH: 800-554-6077 FAX: 952-835-2218 EMAIL: SALES@AIRLOUVERS.COM</p> <p>VISIT WWW.ACTIVARCPG.COM FOR THE MOST UPDATED PRODUCT INFORMATION • AN ACTIVAR CONSTRUCTION PRODUCTS COMPANY</p> <p>ACPG WEST COAST (AIR LOUVERS MANUFACTURING):COMMERCE CA • WAREHOUSES:LANCASTER PA, ATLANTA GA, CHICAGO IL , Bloomington MN</p>		