


VLF - STANDARD SHAPES - ROUND, RADIUS, HALF ROUND

V11

SPECIFICATIONS:

Material:	18 gauge CRS frame.
Construction:	Circular - one piece construction with no joints. Radius and half round are constructed with radius corners, mitered and welded with no exposed joints. Continuous glass retainer all models.
Door:	For 1-3/4" door.
Fasteners:	#8 x 32 Phillips head thru bolts with blank head one side.
Powder Coat Finishes:	___ (B) Mineral Bronze (standard color) ___ (BK) Black ___ (FBK) Flat Black ___ (W) White ___ (SB) SC Beige ___ (SA) Satin Aluminum ___ (R) Red ___ (S) Sand ___ (G) Gray Primer ___ (AB) AMS Beige ___ (GH) Gray Hammertone Color Samples Online
Glass:	3/16" - 1/4" glazing to be ordered separately from Glazing Section of catalog. Use fire rated glazing with (WHI) or UL classification markings for fire rated applications. Visible light is 1" under rough opening size. <u>Glass is 1/4" under order size.</u> Fire-Rated Air Louvers Glazing to fit this vision frame: WS, UL PYRO,KFRF. Non Fire-Rated Glazing: TEMP
Fire-Rating, Testing & Listings:	When installed in properly rated and approved door, ratings up to 3 hours can be achieved, depending on the glazing used. See glazing ratings for max exposed area. Tested and Listed for UL 10C and Criteria of UBC 7-2 Positive Pressure.

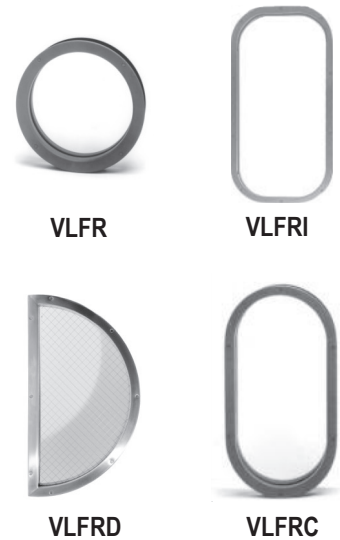


MODELS:

Round:	___ VLFR12 ___ VFR18 ___ VLR24 (Min size 4", max size 60" diameter)
Radius Top & Bottom:	___ VLFRI-6 ___ VLFRI-12 ___ VLFRI-18 ___ VLFRI-24 (Min size 4 x 6", max size 60 x 104")
Radius Corner 6" Radius:	___ VLFRC12 ___ VLFRC18 ___ VLFRC24 (Min size 8" x 8", max size 60 x 104")
Half Round:	___ VLFRD18 Dimensions: 46-1/2" x 18" (Min size VLFRD Models: ___ VLFRD20 Dimensions: 50-5/8" x 20" 6" x 18" max size 36" x 60") ___ VLFRD24 Dimensions: 58-3/4" x 24"

OPTIONS AT ADDITIONAL COST:

UBC 7-2 Installation:	___ Additional intumescent tape for Positive Pressure UL10C 20 minute combustible core wood doors installation. See detailed installation instructions.
Finishes & Materials:	___ (S) 18 Gauge Stainless Steel: #4 Finish. ___ (G) Galvanized Sheet for Exterior Applications. ___ (EG) Electro Zinc Plating for Maximum Corrosion Resistance. ___ Optional colors. Please provide color chip & contact Customer Service.
Fasteners:	___ Torx ___ Hex head ___ Other: _____
Custom:	Custom frame sizes, leadlined. Contact Customer Service for special orders.

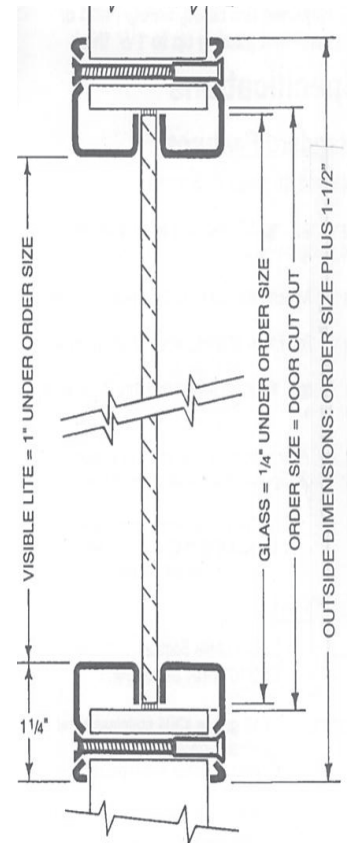

Order Format: ___ **Model** ___ **Option S,G,EG** ___ **Color** **Example: VLFRD S 24**

Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

	Distributor:	Width: ___ x Height: ___
	Architect:	Quantity:
	Contractor:	Model:
	Project:	Date: ___ Version: ALSPDS1001
HDQTRS:4450 WEST 78 TH ST CIR., BLOOMINGTON, MN 55435-5416 PH: 800-554-6077 FAX: 952-835-2218 EMAIL: SALES@AIRLOUVERS.COM VISIT WWW.ACTIVARCPG.COM FOR THE MOST UPDATED PRODUCT INFORMATION • AN ACTIVAR CONSTRUCTION PRODUCTS COMPANY ACPG WEST COAST (AIR LOUVERS MANUFACTURING):COMMERCE CA • WAREHOUSES:LANCASTER PA, ATLANTA GA, CHICAGO IL , Bloomington MN		