


V16

VISION FRAME WITH 12 GAUGE SECURITY GRILLES: VLF-SG


Security Vision Frame With Security Grille Each Side of Glass

SPECIFICATIONS:

Material:	18 gauge CRS frame. Min size 4" x 4", Max 60" x 72". See Fire Rating Below.
Grille:	12 gauge CRS with 13/16" square openings 1" on center.
Construction:	Mitered and welded corners and countersunk mounting holes, grille welded to frame.
Powder Coat Finishes:	<input type="checkbox"/> (B) Mineral Bronze (standard color) <input type="checkbox"/> (BK) Black <input type="checkbox"/> (FBK) Flat Black <input type="checkbox"/> (W) White <input type="checkbox"/> (SB) SC Beige <input type="checkbox"/> (SA) Satin Aluminum <input type="checkbox"/> (R) Red <input type="checkbox"/> (S) Sand <input type="checkbox"/> (AB) AMS Beige <input type="checkbox"/> (G) Gray Primer <input type="checkbox"/> (GH) Gray Hammettone Color Samples Online
Door:	For 1-3/4" door.
Fasteners:	#8 x 32 Phillips head thru bolts with blank head one side.
Glass:	3/16" - 1/4" glazing to be ordered separately from Glazing Section of catalog. Use fire rated glazing with Warnock Hersey (WHI) or UL classification markings for fire rated applications. Visible light is 1" under rough opening size. <u>Glass size is 1/4" under order size.</u> Fire-Rated Air Louvers Glazing to fit this vision frame: WS, UL PYRO,KFRF
Fire-Rating, Testing & Listings:	When installed in properly rated and approved door, ratings up to 3 hours can be achieved, depending on the glazing used. See glazing ratings for max exposed area. Tested and Listed for UL 10C and Criteria of UBC 7-2 Positive Pressure.

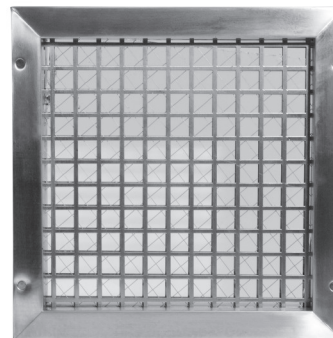

VLF-SG in Optional Stainless Steel Finish

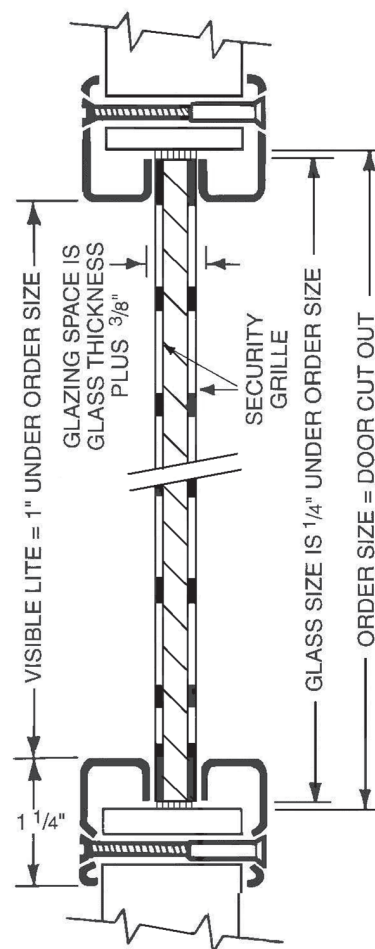

OPTIONS AT ADDITIONAL COST:



UBC 7-2 Installation:	<input type="checkbox"/> Additional intumescent tape for Positive Pressure UL10C 20 minute combustible core wood doors installation. See detailed installation instructions.
Finishes & Materials:	<input type="checkbox"/> (S) 20 Gauge Stainless Steel: #4 Finish. <input type="checkbox"/> (G) Galvanized Sheet for Exterior Applications. <input type="checkbox"/> (EG) Electro Zinc Plating for Maximum Corrosion Resistance. <input type="checkbox"/> Optional colors. Provide color chip & contact Customer Service.
Fasteners:	<input type="checkbox"/> Torx <input type="checkbox"/> Hex head <input type="checkbox"/> Other: _____
Custom:	Smaller or larger sizes, leadlined. Consult Customer Service.

Order Format: VLF-SG

Option S,G,EG W H Color

Example: VLFSG 1212 AMS

Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

	Distributor:	Width: _____ x Height: _____
	Architect:	Quantity:
	Contractor:	Model:
	Project:	Date: _____ Version: ALSPDS1001
<p>HDQTRS:4450 WEST 78TH ST CIR., BLOOMINGTON, MN 55435-5416 PH: 800-554-6077 FAX: 952-835-2218 EMAIL: SALES@AIRLOUVERS.COM VISIT WWW.ACTIVARCPG.COM FOR THE MOST UPDATED PRODUCT INFORMATION • AN ACTIVAR CONSTRUCTION PRODUCTS COMPANY ACPG WEST COAST (AIR LOUVERS MANUFACTURING):COMMERCE CA • WAREHOUSES:LANCASTER PA, ATLANTA GA, CHICAGO IL , Bloomington MN</p>		