


Standard, Multi-Purpose, Thru-Bolted Square Profile Vision Lite for Up to 1/4" Thick Glazing

SPECIFICATIONS:

| | |
|---|---|
| Material: | 18 gauge CRS frame. Min Size 3" x 3", Max 60" x 104". See Fire Rating Below. |
| Construction: | 1-1/4" trim with radius corners, mitered and welded. Continuous glass retainer, countersunk mounting holes on non-corridor side. |
| Door: | For 1-3/4" door. |
| Fasteners: | #8 x 32 flathead phillips head thrubolts with blank heads one side. |
| Powder Coat Finishes: | ___ (B) Mineral Bronze (standard color) ___ (G) Gray Primer ___ (BK) Black ___ (FBK) Flat Black ___ (W) White ___ (SB) SC Beige ___ (SA) Satin Aluminum ___ (R) Red ___ (S) Sand ___ (AB) AMS Beige ___ (GH) Gray Hammertone Color Samples Online |
| Glass: | 3/16" - 1/4" glazing to be ordered separately from Glazing Section of catalog. Use fire rated glazing with Warnock Hersey (WHI) or UL classification markings for fire rated applications. Visible light is 1" under rough opening size. <u>Glass size is 1/4" under order size.</u> Fire-Rated Air Louvers Glazing to fit this vision frame: WS, UL PYRO, PPF, KFRF. |
| Fire-Rating, Testing & Listings: | When installed in properly rated and approved door, ratings up to 3 hours can be achieved, depending on the glazing used. See glazing ratings for max exposed area. Tested and Listed for UL 10C and Criteria of UBC 7-2 Positive Pressure. |

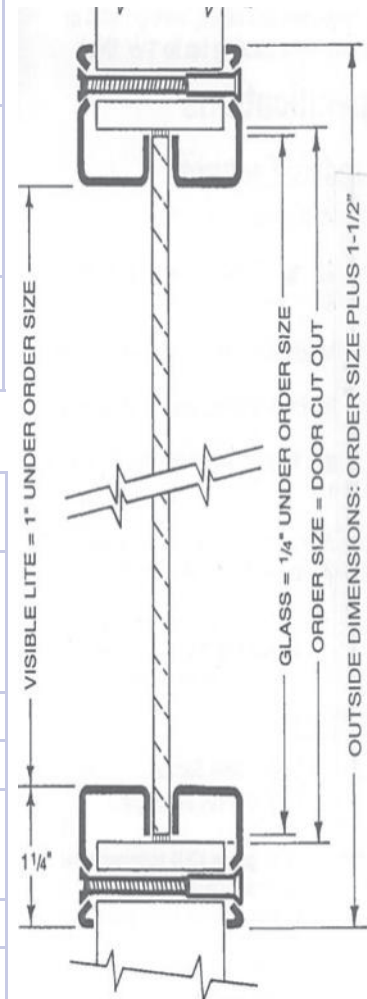

OPTIONS AT ADDITIONAL COST:



| | |
|----------------------------------|--|
| UBC 7-2 Installation: | ___ Additional intumescent tape for Positive Pressure UL10C 20 minute combustible core wood doors installation. See detailed installation instructions. |
| Finishes & Materials: | ___ (S) 18 Gauge Stainless Steel: #4 Finish. ___ (G) Galvanized Sheet for Exterior Applications. ___ (EG) Electro Zinc Plating for Maximum Corrosion Resistance. ___ Optional colors. Please provide color chip & contact Customer Service. |
| Fasteners: | ___ Torx ___ Hex head ___ Other: _____ |
| Mullions: | Factory welded to vision lite & painted. See VSL-G Page in this section to order. |
| Custom: | PAK, smaller or larger sizes. Leadlined. Please consult Customer Service for Special Orders. See Page 14 for Custom Shapes. See Page 11 for Round, Half-Round & Radius Frames in this Catalog. |
| P.O. Slot: | ___ VLFPO 18 gauge frame forms mail slot 3/8" x 11". Outside dim 12" x 1-3/8". |
| Privacy Door: | ___ VLFPVC 16 gauge door on continuous hinges welded to vision lite. Minimum size 4" x 4", max size 60" x 60". |

Order Format: VLF

Option S,G,EG W H Color

Example: VLF 1212FBK

Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

| | | |
|--|---------------------|---------------------------------|
| | Distributor: | Width: ___ x Height: ___ |
| | Architect: | Quantity: _____ |
| | Contractor: | Model: _____ |
| | Project: | Date: _____ Version: ALSPDS1001 |
| HDQTRS:4450 WEST 78 TH ST CIR., BLOOMINGTON, MN 55435-5416 PH: 800-554-6077 FAX: 952-835-2218 EMAIL: SALES@AIRLOUVERS.COM VISIT WWW.ACTIVARCPG.COM FOR THE MOST UPDATED PRODUCT INFORMATION • AN ACTIVAR CONSTRUCTION PRODUCTS COMPANY ACPG WEST COAST (AIR LOUVERS MANUFACTURING):COMMERCE CA • WAREHOUSES:LANCASTER PA, ATLANTA GA, CHICAGO IL, Bloomington MN | | |