


**Low Profile Beveled Vision Lite For Fire Rated Doors. Self-Attaching Frame Has Single-side fasteners Available in Round Shapes and with Wood Veneer for Glass 3/16" to 1/4"**

**SPECIFICATIONS:**

<b>Material:</b>	20 gauge CRS frame. Min Size 3" x 3", Max 60" x 104". See Fire Rating Below.
<b>Construction:</b>	1-1/4" trim with radius corners, mitered and welded. Continuous glass retainer, countersunk mounting holes in the bevel on non-corridor side.
<b>Door:</b>	For 1-3/4" door. For other sizes, see models VLFIG and VLFEZIG.
<b>Fasteners:</b>	#8 x 7/8" flathead phillips SMS. Woodlite has wood veneer plugs covering screw heads.
<b>Powder Coat Finishes:</b>	___ (B) Mineral Bronze ___ (G) Gray Primer (stock colors for VSL) ___ (BK) Black ___ (FBK) Flat Black ___ (W) White ___ (SB) SC Beige ___ (SA) Satin Aluminum ___ (R) Red ___ (S) Sand ___ (AB) AMS Beige ___ (GH) Gray Hammertone <b>Color Samples Online</b>
<b>Glass:</b>	3/16"- 1/4" glazing to be ordered separately from <b>Glazing Section</b> of catalog. Use fire rated glazing with Warnock Hersey (WHI) or UL classification markings for fire rated applications. Visible light is 2" under rough opening size. Glass size is 1" under order size. <b>Fire-Rated Air Louvers Glazing to fit this Product: WS, UL, KFRF, PPF, PYRO.</b>
<b>Fire-Rating, Testing &amp; Listings:</b>	When installed in properly rated and approved door, ratings up to 3 hours can be achieved, <b>depending on the glazing used.</b> See glazing ratings for max exposed area. Tested and Listed for UL 10C and Criteria of UBC 7-2 Positive Pressure.

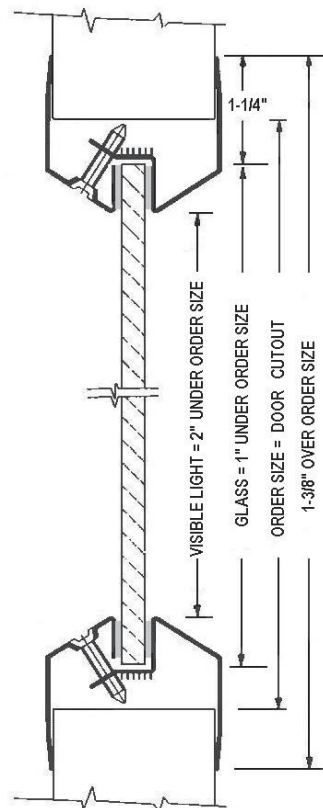

**OPTIONS AT ADDITIONAL COST:**



<b>PAK:</b>	Includes Vision Lite, Glass Sized to Fit, Applied Glazing tape for UL10B Installations, Securely Packaged Individually. <b>See First Page in Vision Lite Catalog.</b>
<b>UBC 7-2 Installation:</b>	___ Additional intumescent tape for <b>Positive Pressure UL10C</b> 20 minute combustible core wood doors installation. See detailed installation instructions.
<b>Finishes &amp; Materials:</b>	___ (S) 20 Gauge Stainless Steel: #4 Finish. ___ (G) Galvanized Sheet for Exterior Applications. ___ (EG) Electro Zinc Plating for Maximum Corrosion Resistance.
<b>Woodlite Wood Veneers:</b>	___ <b>VWL</b> .018 Wood Veneer to Match Wood Finish. (except round models) ___ <b>Veneer Type:</b> (WB) White Birch, (RO) Red Oak, (WO) White Oak, (MA) Maple, (CH) Cherry, (HM) Honduras Mahogany. See website for more colors & photos.
<b>Fasteners:</b>	___ Torx ___ Hex head ___ Other: _____
<b>Mullions:</b>	Factory welded to vision lite & painted. See <b>VSL-G</b> Page in this section to order.
<b>Round Vision Lite:</b>	___ <b>SLR-12:</b> One piece, 18 gauge construction. 11" glazing. (n/a (S) material) ___ <b>SLR-18:</b> One piece, 18 gauge construction. 17" glazing. (n/a (S) material) ___ <b>SLR-24:</b> One piece, 18 gauge construction. 23" glazing. (n/a (S) material)
<b>Custom:</b>	Smaller or larger size or other options; Contact Customer Service for special orders.

**STOCK ITEM - MANY STANDARD SIZES OF VSL FRAMES IN STOCK FOR NEXT DAY SHIPMENT FROM ALL WAREHOUSES**

**Order Format:**

VSL, SLR, VWL Option S,G,EG W H Color

**Example: VSL 1212GH**

Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

	<b>Distributor:</b>	Width: ___ x Height: ___
	<b>Architect:</b>	Quantity:
	<b>Contractor:</b>	Model:
	<b>Project:</b>	Date: _____ Version: ALSPDS1001
HDQTRS:4450 WEST 78 <sup>TH</sup> ST CIR., BLOOMINGTON, MN 55435-5416 PH: 800-554-6077 FAX: 952-835-2218 EMAIL: SALES@AIRLOUVERS.COM VISIT <b>WWW.ACTIVARCPG.COM</b> FOR THE MOST UPDATED PRODUCT INFORMATION • AN ACTIVAR CONSTRUCTION PRODUCTS COMPANY ACPG WEST COAST (AIR LOUVERS MANUFACTURING):COMMERCE CA • WAREHOUSES:LANCASTER PA, ATLANTA GA, CHICAGO IL , Bloomington MN		