



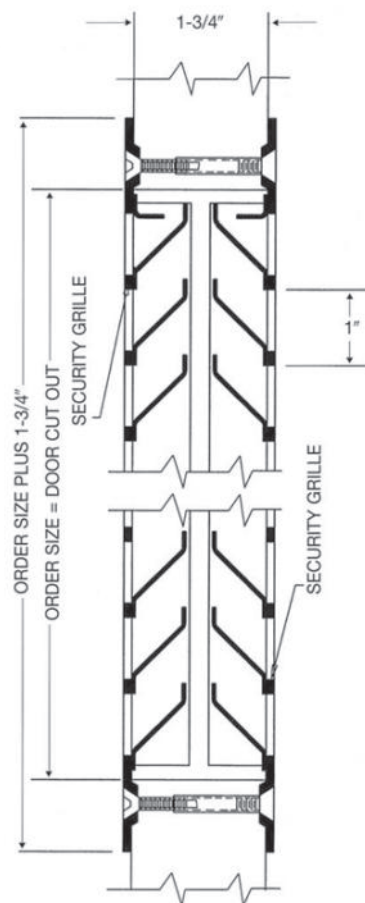

Inverted "Y" Blades with Security Grille Meets up to 350 ft lb Impact Rating for Severe Windstorm Rating. Electro-Galvanized Finish Provides Weatherproof Finish for Exterior Applications.

Florida Building Code
Approval File # FL13341



SPECIFICATIONS:

Material:	18 gauge CRS frame and blades; 12 gauge CRS security grille. Minimum size 6" X 6", Maximum size 24" x 64"
Construction:	Louvers: 2 rows of Inverted, split "Y" blades with 1" blade spacing are attached to welded frame with by interlocking construction. Non-vision design. Security Frame: Security grille is welded to on interior and exterior of louver with 13/16" square openings 1" on center. Thru-bolted to door.
Door:	1-3/4". For 1-3/8" doors, consult factory. Door cutout = order size.
Fasteners:	#8-32 Phillips head thru-bolts with blank head one side.
Finish:	Standard Electro-Galvanized finish.
Free Flow Area:	40% free area.

OPTIONAL FEATURES AT AN ADDITIONAL COST:

Finishes & Materials:	<input type="checkbox"/> (S) 20 gauge stainless steel—#4 finish. <input type="checkbox"/> (G) Galvanize sheet for Corrosion Resistance & Exterior Use. <input type="checkbox"/> 16 gauge CRS blade and 10 gauge security grille. <input type="checkbox"/> Special order colors. Please provide color chip.
Fasteners:	<input type="checkbox"/> Torx <input type="checkbox"/> Hex head <input type="checkbox"/> Other: _____
Screen:	<input type="checkbox"/> 18-14 mesh insect screen installed in roll formed aluminum frame <input type="checkbox"/> Aluminum <input type="checkbox"/> bronze <input type="checkbox"/> fiberglass <input type="checkbox"/> stainless <input type="checkbox"/> Bird Screen
Custom:	Custom sizes, other door thickness, other options; Contact Customer Service.

LISTING & RATINGS:

1500A-HR Listed Severe Windstorm

Approved Louver W/N 14476

Tested in Accordance with:
ASTM E330, ASTM E1996, ANSI A250.13
TAS 203, 201, 202, ASTM E 1886
Impact (ft lb) 350
DP Rating (PSF) 60

Order Format: **1500A-HRC** _____ _____ _____ _____
Example: 1500A-HRC 2464B Option S,EG W H Color

	Distributor: _____	Width: _____ x Height: _____
	Architect: _____	Quantity: _____
	Contractor: _____	Model: _____
	Project: _____	Date: _____ Version: ALSPDS1001
<p>HDQTRS: 4450 WEST 78TH ST CIR., BLOOMINGTON, MN 55435-5416 PH: 800-554-6077 FAX: 952-835-2218 EMAIL: SALES@AIRLOUVERS.COM VISIT WWW.ACTIVARCPG.COM FOR THE MOST UPDATED PRODUCT INFORMATION • AN ACTIVAR CONSTRUCTION PRODUCTS COMPANY ACPG WEST COAST (AIR LOUVERS MANUFACTURING): COMMERCE CA • WAREHOUSES: LANCASTER PA, ATLANTA GA, CHICAGO IL, Bloomington MN</p>		