
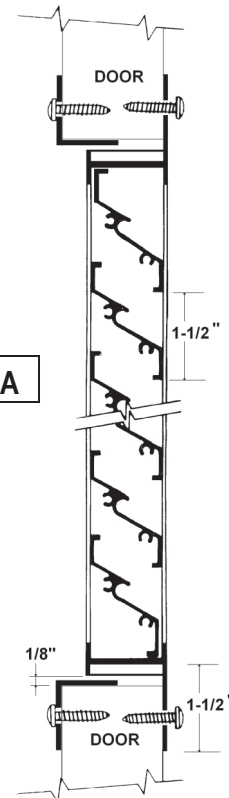


Stormproof Aluminum "Z" Blades Incorporate a Water Baffle, Suitable for Exterior Applications Where Weather Protection is Required. Available with Insect or Bird Screen.



SPECIFICATIONS:

Material:	.063" thick 6063-T5 extruded aluminum. Min size 8" x 8", Max 36" x 80".
Construction:	Louver: "Z" blades with water baffle at 1-1/2" intervals. Non-vision design. 1400A Frame: 1/2" trim with reinforced mitered corners. Louver frame is screwed into door from 2 sides.
Door:	_____ 1 3/8"-1 3/4" - Any Style. Door cutout = order size.
Mounting Options:	_____ Select one mounting option from table below.
Fasteners:	#8 x 3/4" Phillips head screws.
Finish:	Standard aluminum mill finish.
Free Flow Area:	35% free area.

OPTIONAL FEATURES AT AN ADDITIONAL COST:

Finish:	_____ Bronze or clear anodized. _____ Special order colors. Please provide color chip.
Fasteners:	_____ Torx _____ Hex head _____ Other: _____
Screen:	_____ 18x14 mesh insect screen installed in roll-formed aluminum frame. _____ aluminum _____ bronze _____ fiberglass _____ stainless _____ Bird Screen.
Custom:	Custom sizes, other door thickness, other options; Contact Customer Service.

Order Format:	1400 _____
Example: 1400C1212	A,CORE,C W H

DOOR MOUNTING OPTIONS - SELECT ONE	
<p>1400A: (Shown Above) Basic blade unit with flanged frame welded to face (corridor) side and separate removable flanged frame on opposite side; frame adjustable to fit any door thickness from 1-3/8" to 1-3/4".</p>	
<p>1400 CORE: Basic blade unit only; for interior doors; or as transom louver held in place with wood or metal moulding (furnished by others).</p>	
<p>1400C: Basic blade unit with single flanged frame welded to face (corridor) side; for interior or exterior doors; wood or metal moulding (by others) used on opposite side.</p>	

	Distributor: _____	Width: _____ x Height: _____
	Architect: _____	Quantity: _____
	Contractor: _____	Model: _____
	Project: _____	Date: _____ Version: ALSPDS1001
<p>HQTRS:4450 WEST 78TH ST CIR., BLOOMINGTON, MN 55435-5416 PH: 800-554-6077 FAX: 952-835-2218 EMAIL: SALES@AIRLOUVERS.COM VISIT WWW.ACTIVARCPG.COM FOR THE MOST UPDATED PRODUCT INFORMATION • AN ACTIVAR CONSTRUCTION PRODUCTS COMPANY ACPG WEST COAST (AIR LOUVERS MANUFACTURING):COMMERCE CA • WAREHOUSES:LANCASTER PA, ATLANTA GA, CHICAGO IL , Bloomington MN</p>		