


Many Specialty Designs Can be Manufactured Using the VLF Profile Including the Examples Shown

SPECIFICATIONS:

Material:	18 gauge CRS frame.
Construction:	Radius and half round are constructed with radius corners, mitered and welded with no exposed joints. Continuous glass retainer all models.
Door:	For 1-3/4" door.
Fasteners:	#8 x 32 Phillips head thru bolts with blank head one side.
Powder Coat Finishes:	____ (B) Mineral Bronze (standard color) ____ (BK) Black ____ (FBK) Flat Black ____ (W) White ____ (SB) SC Beige ____ (SA) Satin Aluminum ____ (R) Red ____ (S) Sand ____ (AB) AMS Beige ____ (G) Gray Primer ____ (GH) Gray Hammertone Color Samples Online
Glass:	3/16" - 1/4" glazing to be ordered separately from Glazing Section of catalog. Use fire rated glazing with Warnock Hersey (WHI) or UL classification markings for fire rated applications. Visible light is 1" under rough opening size. Glass is 1/4" under order size. Fire-Rated Air Louvers Glazing to fit this vision frame: WS, UL PYRO,KFRF. Non Fire-Rated Glazing: TEMP
Fire-Rating, Testing & Listings:	When installed in properly rated and approved door, ratings up to 3 hours can be achieved, depending on the glazing used. See glazing ratings for max exposed area. Tested and Listed for UL 10C and Criteria of UBC 7-2 Positive Pressure.

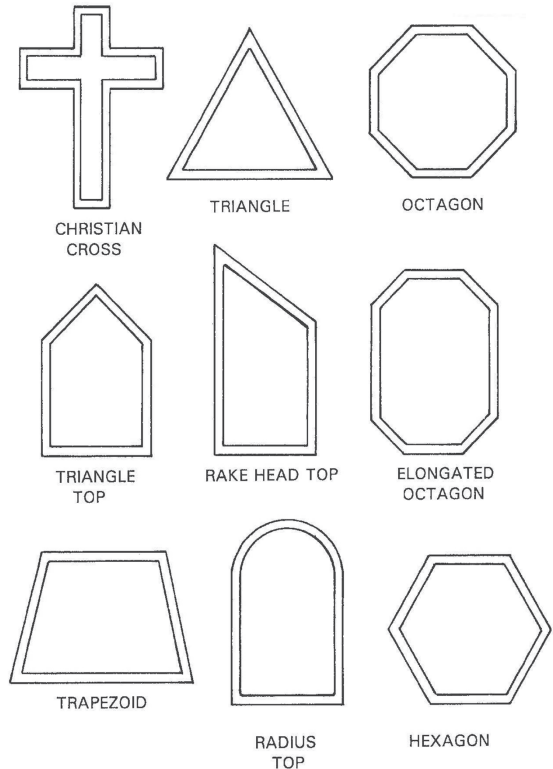

OPTIONS AT ADDITIONAL COST:



UBC 7-2 Installation:	____ Additional intumescent tape for Positive Pressure UL10C 20 minute combustible core wood doors installation. See detailed installation instructions.
Finishes & Materials:	____ (S) 18 Gauge Stainless Steel: #4 Finish. ____ (G) Galvanized Sheet for Exterior Applications. ____ (EG) Electro Zinc Plating for Maximum Corrosion Resistance. ____ Optional colors. Please provide color chip & contact Customer Service.
Fasteners:	____ Torx ____ Hex head ____ Other: _____
Custom:	Custom frame sizes, leadlined. Contact Customer Service.

DRAWING AND DIMENSIONS ARE TO BE ATTACHED TO THIS PAGE

Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

	Distributor:	Width: ____ x Height: ____
	Architect:	Quantity:
	Contractor:	Model:
	Project:	Date: _____ Version: ALSPDS1001
HDQTRS:4450 WEST 78 TH ST CIR., BLOOMINGTON, MN 55435-5416 PH: 800-554-6077 FAX: 952-835-2218 EMAIL: SALES@AIRLOUVERS.COM VISIT WWW.ACTIVARCPG.COM FOR THE MOST UPDATED PRODUCT INFORMATION • AN ACTIVAR CONSTRUCTION PRODUCTS COMPANY ACPG WEST COAST (AIR LOUVERS MANUFACTURING):COMMERCE CA • WAREHOUSES:LANCASTER PA, ATLANTA GA, CHICAGO IL , Bloomington MN		